

| Tevac's Part No. | Other's Part No. | I.D. | O.D. | Length | Lead Length | Watts | Volts | With T/C | Profiled Heat |
|------------------|------------------|------|-------|--------|-------------|-------|-------|----------|---------------|
| CHJ1JH90 | SSTC-62-90 | .500 | .750 | 1.45 | 36" W/G | 250 | 240 | Yes | Yes |
| CHJ2AH | N/A | .500 | .750 | 2.0 | 36" W/G | 340 | 240 | Yes | No |
| CHJ2AH90 | SSTC-72-90 | .500 | .750 | 2.0 | 36" W/G | 250 | 240 | Yes | Yes |
| CHJ2JH | N/A | .500 | .750 | 2.5 | 42" | 300 | 240 | Yes | Yes |
| CHJ2J2H | SSTC-42 | .500 | .750 | 2.5 | 40" W/G | 450 | 240 | Yes | No |
| CHJ2J2H90 | SSTC-42-90 | .500 | .750 | 2.5 | 40" W/G | 450 | 240 | Yes | No |
| CHJ2J3H | N/A | .500 | .750 | 2.5 | 36" | 340 | 230 | Yes | Yes |
| CHJ3AH | N/A | .500 | .750 | 3.0 | 36" | 380 | 230 | Yes | Yes |
| CHJ3JH | N/A | .500 | .750 | 3.5 | 36" W/G | 340 | 240 | Yes | Yes |
| CHJ3J2H | N/A | .500 | .750 | 3.5 | 42" | 300 | 120 | Yes | Yes |
| CHJ4JH | N/A | .500 | .750 | 4.5 | 36" W/G | 340 | 240 | Yes | Yes |
| CHJ4J2H | N/A | .500 | .750 | 4.5 | 36" W/G | 400 | 240 | Yes | Yes |
| CHJ4J3H | SSTC-32 | .500 | .750 | 4.5 | 36" W/G | 300 | 240 | Yes | Yes |
| CHJ4J3H90 | SSTC-32-90 | .500 | .750 | 4.5 | 36" W/G | 300 | 240 | Yes | Yes |
| CHJ4J4H | SSTC-31 | .500 | .750 | 4.5 | 48" W/G | 300 | 120 | Yes | Yes |
| CHJ4J4H90 | SSTC-31-90 | .500 | .750 | 4.5 | 48" W/G | 300 | 120 | Yes | Yes |
| CHJ4J5H | N/A | .500 | .750 | 4.5 | 36" | 400 | 230 | Yes | Yes |
| CHN2JH | N/A | .750 | 1.0 | 2.5 | 36" | 315 | 240 | Yes | No |
| CHN2J2H | N/A | .750 | 1.0 | 2.5 | 42" | 315 | 240 | No | Yes |
| CHR8CH | N/A | .875 | 1.125 | 8.12 | 36" | 1310 | 240 | No | No |

TEVAC STANDARD COIL HEATERS WITH FLEX HOSE
SSTC Series

PROFILED & NON PROFILED WITH & W/O THERMOCOUPLE

- High Watt Densities
- Quantity Discounts Available



DIRECT REPLACEMENTS AT LOWER PRICES!




Heaters with 90 at end of part number have 90°Exit Leads.

Blanket Orders Available!

CAM OPERATED MINI COIL HEATERS

| Tevac's Part No. | Other's No. | I.D. | LENGTH | WATTS | VOLTS |
|------------------|-------------|-------|--------|-------|-------|
| NO T/C | | | | | |
| CHA-75-A | 534234 | .75" | 1.2" | 149 | 240 |
| CHA-75-B | 534233 | .75" | 1.2" | 268 | 240 |
| CHA-875-B | - | .875" | 1.2" | 268 | 240 |
| CHA-875-C | - | .875" | .90" | 268 | 240 |
| WITH T/C | | | | | |
| CHA-75-A-TC | - | .75" | 1.2" | 149 | 240 |
| CHA-75-B-TC | - | .75" | 1.2" | 268 | 240 |
| CHA-875-B-TC | - | .875" | 1.2" | 268 | 240 |

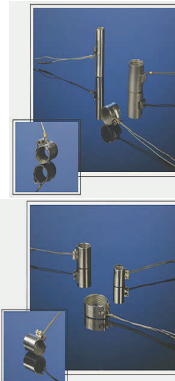

TEVAC COIL HEATERS REPLACEMENT SHEATH-TYPE

- Available with Built-In Thermocouple
- +/- 2% Resistance Tolerance
- 5" and 7" Staggered Crimps
- 72" Insulated Lead Wire Length (White/Black 250 Watts) (White/Red 125 Watts)
- OEM Compatible
- Variances available upon request
- "J" Type TC provided unless otherwise specified.
- "K" Type is also available. Photos shown do not reflect built in thermocouple.

MANY IN STOCK FOR IMMEDIATE DELIVERY

AXIAL WEDGE LOCK-UP COIL HEATERS

| Tevac's Part No. | Other's No. | I.D. | LENGTH | WATTS | VOLTS |
|------------------|-------------|-------|--------|-------|-------|
| NO T/C | | | | | |
| CHW-75-A | 534445 | .75" | 1.2" | 149 | 240 |
| CHW-75-B | 534192 | .75" | 1.2" | 268 | 240 |
| CHW-87-A | - | .875" | 2" | 250 | 230 |
| CHW-100-B | - | 1" | 1.2" | 250 | 230 |
| WITH T/C | | | | | |
| CHW-75A-TC | - | .75" | 1.2 | 149 | 240 |

SCREW MINI COIL HEATERS

| Tevac's Part No. | Other's No. | I.D. | LENGTH | WATTS | VOLTS |
|------------------|-------------|-------|--------|-------|-------|
| NO T/C | | | | | |
| CHC-75-A | 520156 | .75" | 1.2" | 149 | 240 |
| CHC-75-B | 521334 | .75" | 1.2" | 268 | 240 |
| CHC-875-A | - | .875" | 1.2" | 149 | 240 |
| CHC-875-B | - | .875" | 1.2" | 268 | 240 |
| WITH T/C | | | | | |
| CHC-75-A-TC | - | .75" | 1.2" | 125 | 240 |
| CHC-75-B-TC | - | .75" | 1.2" | 250 | 240 |
| CHC-875-A-TC | - | .875" | 1.2" | 125 | 240 |
| CHC-875-B-TC | - | .875" | 1.2" | 250 | 240 |

| Tevac's Part No. | Other's Part No. | I.D. | O.D. | Length | Lead Length | Watts | Volts | With T/C | Profiled Heat |
|------------------|------------------|-------|-------|--------|-------------|-------|-------|----------|---------------|
| CHL1A | SCH0003 | .625 | .875 | .975 | 42"W/G | 225 | 240 | Yes | No |
| CHL2A | SCH0081 | .625 | .875 | 2.0 | 36"W/G | 300 | 240 | Yes | Yes |
| CHL2J | SCH0082 | .625 | .875 | 2.5 | 36"W/G | 350 | 240 | Yes | Yes |
| CHL3A | SCH0083 | .625 | .875 | 3.0 | 36"W/G | 400 | 240 | Yes | Yes |
| CHL3J | SCH0084 | .625 | .875 | 3.5 | 36"W/G | 425 | 240 | Yes | Yes |
| CHL4A | SCH0085 | .625 | .875 | 4.0 | 36"W/G | 500 | 240 | Yes | Yes |
| CHL5A | SCH0086 | .625 | .875 | 5.0 | 36"W/G | 500 | 240 | Yes | Yes |
| CHL6A | SCH0087 | .625 | .875 | 6.0 | 36"W/G | 500 | 240 | Yes | Yes |
| CHN1J | SCH0060 | .750 | 1.0 | 1.437 | 36"W/G | 250 | 240 | Yes | Yes |
| CHN1N | SCH314-2 | .750 | 1.0 | 1.75 | 45"W/G | 315 | 240 | Yes | Yes |
| CHN2A | SCH0061 | .750 | 1.0 | 1.937 | 36"W/G | 300 | 240 | Yes | Yes |
| CHN2J | SCH0062 | .750 | 1.0 | 2.437 | 36"W/G | 350 | 240 | Yes | Yes |
| CHN2J2 | SCH324-2 | .750 | 1.0 | 2.437 | 45"W/G | 315 | 240 | Yes | Yes |
| CHN3A | SCH0063 | .750 | 1.0 | 2.937 | 36"W/G | 400 | 240 | Yes | Yes |
| CHN3J | SCH0064 | .750 | 1.0 | 3.437 | 36"W/G | 425 | 240 | Yes | Yes |
| CHN4J | SCH0065 | .750 | 1.0 | 4.437 | 36"W/G | 500 | 240 | Yes | Yes |
| CHN5J | SCH0066 | .750 | 1.0 | 5.437 | 36"W/G | 500 | 240 | Yes | Yes |
| CHR2E | SCH0088 | .875 | 1.125 | 2.125 | 36"W/G | 400 | 240 | Yes | Yes |
| CHR2L | SCH0089 | .875 | 1.125 | 2.625 | 36"W/G | 450 | 240 | Yes | Yes |
| CHR3E | SCH0090 | .875 | 1.125 | 3.125 | 36"W/G | 550 | 240 | Yes | Yes |
| CHR3L | SCH0091 | .875 | 1.125 | 3.625 | 36"W/G | 700 | 240 | Yes | Yes |
| CHR4E | SCH0092 | .875 | 1.125 | 4.125 | 36"W/G | 800 | 240 | Yes | Yes |
| CHR5E | SCH0093 | .875 | 1.125 | 5.125 | 36"W/G | 900 | 240 | Yes | Yes |
| CHR6E | SCH0094 | .875 | 1.125 | 6.125 | 36"W/G | 1000 | 240 | Yes | Yes |
| CHR7E | SCH0095 | .875 | 1.125 | 7.125 | 36"W/G | 1100 | 240 | Yes | Yes |
| CH1J3RB-Z | SCH0096 | 1.50 | 1.74 | 4.0 | 36"W/G | 1000 | 240 | Yes | Yes |
| CH1J6AB-Z | SCH0098 | 1.50 | 1.68 | 6.0 | 36"W/G | 1100 | 240 | Yes | Yes |
| CH1J7AB-Z | SCH0099 | 1.50 | 1.68 | 7.0 | 36"W/G | 1100 | 240 | Yes | Yes |
| CH2C4AB-Z | 2674523 | 2.125 | 2.295 | 4.0 | 144"Fb | 1300 | 230 | No | No |

**TEVAC
STANDARD COIL HEATERS
WITH FIBERGLASS SLEEVING**

SCH Series



**PROFILED & NON PROFILED
WITH & W/O THERMOCOUPLE**

- High Watt Densities
- Quantity Discounts Available

**DIRECT REPLACEMENTS
AT LOWER PRICES!**

Blanket Orders Available!

**Compare & Save...
UP TO \$50 LESS
PER HEATER
THAN THE COMPETITION!!!**

| Tevac's Part No. | OEM Part No. | I.D. | Length | Watts | Volts |
|------------------|--------------|---------------|--------|-------|-------|
| CHB-75-30mm | 534975 | 19.05mm(3/4") | 30mm | 220 | 240 |
| CHB-75-40mm | 534976 | 19.05mm(3/4") | 40mm | 220 | 240 |
| CHB-75-50mm | 534977 | 19.05mm(3/4") | 50mm | 220 | 240 |
| CHB-75-60mm | 534978 | 19.05mm(3/4") | 60mm | 220 | 240 |
| CHB-75-60mm-4 | 1501594 | 19.05mm(3/4") | 60mm | 400 | 240 |
| CHB-75-70mm | 534979 | 19.05mm(3/4") | 70mm | 220 | 240 |
| CHB-75-80mm | 534980 | 19.05mm(3/4") | 80mm | 220 | 240 |
| CHB-75-90mm | 534981 | 19.05mm(3/4") | 90mm | 220 | 240 |
| CHB-75-100mm | 534982 | 19.05mm(3/4") | 100mm | 220 | 240 |
| CHB-75-110mm | 534983 | 19.05mm(3/4") | 110mm | 220 | 240 |
| CHB-75-110mm-4 | 1502996 | 19.05mm(3/4") | 110mm | 400 | 240 |
| CHB-75-150MM | 1502998 | 19.05mm(3/4") | 150mm | 450 | 240 |
| CHB-125-45MM | 535069 | 31.5mm(1.24") | 45mm | 400 | 240 |
| CHB-252-145MM | 1502506 | .252 | 145mm | 190 | 240 |
| CHB-75-CAP | 535181 | | Cap | | |

**TEVAC
COIL HEATERS 750 SERIES
OEM REPLACEMENTS**





- Interchangeable with original OEM parts
 - Quantity Discounts Available


**DIRECT REPLACEMENTS
AT LOWER PRICES!**

**MANY IN STOCK FOR
IMMEDIATE DELIVERY**

TEVAC RUNNERLESS MOLDS
HOT RUNNER-MINERAL INSULATED THERMOCOUPLES

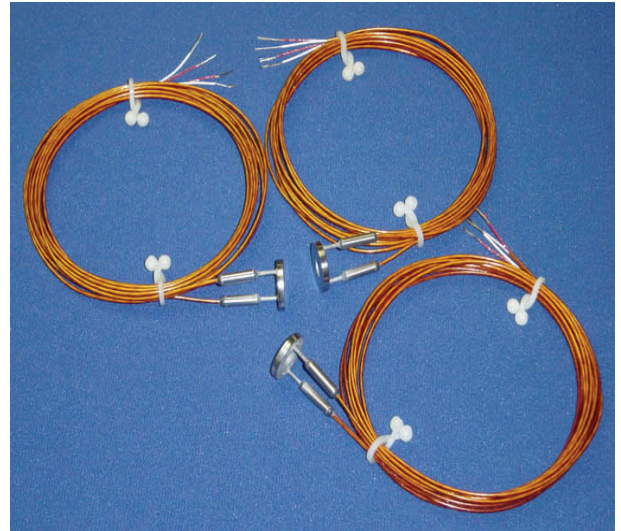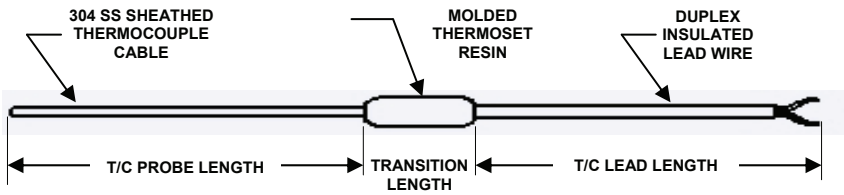

| OTHER'S PART NO. |
|------------------|
| 533243 |
| 534184 |
| 534443 |
| 543541 |
| 535002 |
| 535037 |
| 535038 |
| 535681 |
| 535709 |
| 536194 |
| 1503163 |
| 1503171 |
| 2068732 |

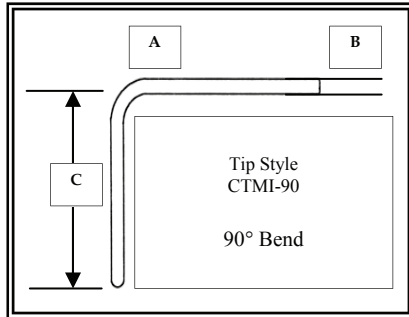

FILL IN BELOW AND CALL, E-MAIL OR FAX FOR PRICE

| TEVAC Product Number: CTMI Straight Probe or CTMI90 90° Probe | → | | EXAMPLE | CTMI90 | | | | | | | | | | |
|--|--------------------|--------------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|---|--|--|---|
| Product Diameter: .75mm to 4mm | → | | | .75 mm | | | | | | | | | | |
| Probe Length: Straight / "A" : 1" to 18" or 90° / "C" : 1" to 18" | → | | | C = 2" | | | | | | | | | | |
| Lead Length: 12" to 240" | → | | | 72" | | | | | | | | | | |
| Lead Type: Bd = Braid Fb = Fiberglass Tf = Teflon Kp = Kapton | → | | | Kp | | | | | | | | | | |
| Calibrations: J = Type J K = Type K T = Type T E = Type E | → | | | J | | | | | | | | | | |
| Molded Transitions: <table border="0" style="width: 100%;"> <thead> <tr> <th style="text-align: left;">Probe Diameter:</th> <th style="text-align: left;">Molded Transition:</th> </tr> </thead> <tbody> <tr> <td>1. .75 MM</td> <td>.165 x .750</td> </tr> <tr> <td>2. 1.0 MM</td> <td>.188 x .750</td> </tr> <tr> <td>3. 1.5 MM</td> <td>.204 x .750</td> </tr> <tr> <td>4. 2.0 MM</td> <td>.250 x .875</td> </tr> </tbody> </table> | Probe Diameter: | Molded Transition: | 1. .75 MM | .165 x .750 | 2. 1.0 MM | .188 x .750 | 3. 1.5 MM | .204 x .750 | 4. 2.0 MM | .250 x .875 | → | | | 2 |
| Probe Diameter: | Molded Transition: | | | | | | | | | | | | | |
| 1. .75 MM | .165 x .750 | | | | | | | | | | | | | |
| 2. 1.0 MM | .188 x .750 | | | | | | | | | | | | | |
| 3. 1.5 MM | .204 x .750 | | | | | | | | | | | | | |
| 4. 2.0 MM | .250 x .875 | | | | | | | | | | | | | |
| Junction/Other: G = Ground U = Ungrounded P = Plug | → | | | G | | | | | | | | | | |

TEVAC will cross reference other manufacturer's part numbers for you!
OEM QUALITY!
QUICK QUOTES on your Custom Items! Specialty Items in just days!