


A perforated rather than insulated ceramic band with a cowl, plenum and blower is designed for use on plastic extrusion equipment where the process generates excessive heat. When a predetermined temperature is exceeded, the blower will engage, cooling the process.

**Features:**

- Replaces most O.E.M. type assemblies
  - Easy to Install
- Long life Ceramic Heater Bands Standard
  - Cast Aluminum & Mica Bands available
  - Hinged Shroud
- Recommended Wattage: 30 watts sq/in.
  - Recommended Voltage: 230Volts (can be wired for 460/480V)
- Blower voltage: 120V standard ( 240V available)
  - Thermocouple hole: please specify location
- Shroud OD approximately 3" larger than barrel
  - Spacing between ceramic bands 1"-1 1/2"
    - Ceramic Heaters sheath: Perforated (to aid in air cooling)
  - One piece ceramic band standard
    - Number of heater determined by size of blower assembly

**TO PLACE AN ORDER, PLEASE SPECIFY:**


- INSIDE DIAMETER
- WIDTH
- TYPE OF TERMINATION AND LOCATION
- WATTS AND VOLTS
- SKETCH OR DRAWING IF NECESSARY

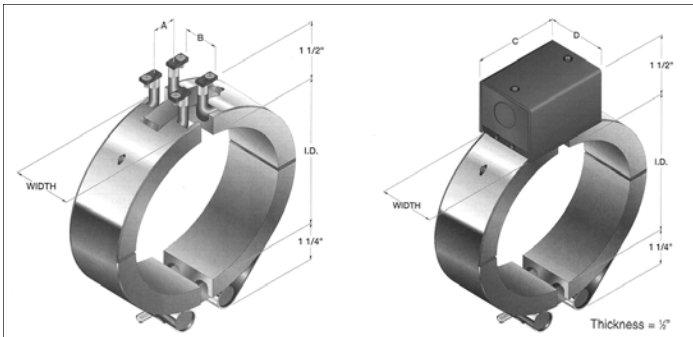

**TEVAC**  
**ALUMA-SHOE BAND HEATER**

The ALUMA-SHOE band incorporates a tubular heater set pressed in a grooved aluminum extrusion. It offers a quick responding band heater with uniform sheath temperatures.

- EXCELLENT HEAT TRANSFER
- RUGGED LONG LASTING DESIGN
- VIRTUALLY CONTAMINATION PROOF
- UNIFORM SHEATH TEMPERATURE
  - EASY INSTALLATION

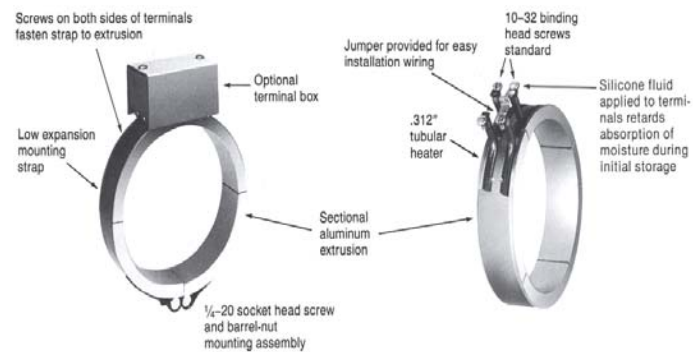

DIMENSION REFERENCE	1-1/2" WIDE	2-1/2" WIDE	3" WIDE	4" WIDE
A	1"	1-1/2"	1-1/2"	2"
B	3/4"	1-13/16"	2"	3-1/4"
C	3-3/8"	4"	4"	4"
D	2"	2-3/4"	3-5/8"	4-1/4"
E	2"	2-3/8"	2-3/8"	3-3/8"

COOLING TUBES  
 STAINLESS STEEL  
 OR COPPER  
 AVAILABLE

DIAMETERS  
 FROM 3-1/2" & UP.  
 3/4" WIDE ALSO  
 AVAILABLE