



OPTION 1




Barrel Nut Strap – Standard Heater Construction. High torque clamping straps provide superior heat transfer and greatest heater life; should be used whenever possible. Flexible strap locating allows for easier installation.

OPTION 2




Clamping Tabs – Are available for applications where straps impede openings for instrumentation. However, high-torque clamping straps provide superior heat transfer and should be used whenever possible.

OPTION 3



Integral Straps — attached straps eliminate strap loss. Especially helpful on large, 2 piece bands, where installation of heater and separate strap may be awkward. Stainless steel outer sheath provides low expansion clamping pressure across the entire heater surface.

OPTION 4




Wedge Lock — provides low profile clamping where space is limited and can not be used. Available in Type 3 or 4 leads.




TEVAC DESIGN OPTIONS

ONE PIECE




Standard Construction
The 1pc design allows for continuous windings of the resistance ribbon with minimal cold sections along the diameter of the band.

TWO PIECE




Two Piece Bands can be easily installed over a cylinder rather than slipped on from the end. Specify the line voltage and wattage per half. Available in all lead options.

E-EXPANDABLE

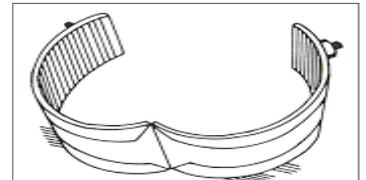


Expandable Bands are designed to be opened and closed for quick installation. They are shipped open and **should not be opened or closed more than twice.** Available in all lead options.

H-HOLE




Holes, Cut-Outs & Notches
Provide clearance for T/C probes, bolts, etc. Specify hole locations in degrees from center of gap. For critical locations provide sample band or detailed drawing. Available in all lead options. In many cases an oversized gap can eliminate the need for special holes.

IR-IRREGULAR SHAPE



Hexagonal, Rectangular, Square, or Irregular Shaped Heaters - offered for special shaped dies and applications. 1 or 2pc construction is available.

TMN-T/C MOUNTING NUT

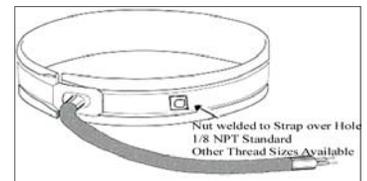

T/C Mounting Brackets- available for attachment to the heater band strap to hold the T/C sensor in place. Specify location. 1/8 NPT thread size standard, other NPT sizes available.