


**Ideal for
Troubleshooting
or Tool Setup!**

**Accurately Measure Flowrates
BTUs & Temperatures.
No need to guess!
Portable LCD Unit**



* Connector not shown.

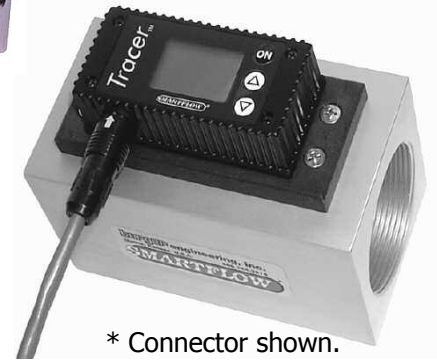

* Connector shown.

Specifications

Wetted Parts

- Flowmeter Body.....Nickel-Plated Brass
- Sight Window.....Polysulfone
- Impeller.....Nylon 6/12
- Impeller Shaft.....303 Stainless Steel
- Magnet.....Neodymium

Power

- Battery.....3.6V 1.0A LithiumTadiran 5902
- Battery Life.....40-50hrs

Temperature


- Range32°F-230°F (0°C to 110°C)
- Accuracy.....±2% of display value
- Repeatability.....±1% of display value

Environmental

- Pressure.....150 psi max

Features and Benefits

- **Bi-directional Flow Reading**
- **English or Metric Units**
- **Optional Quick Connect Fittings***
- **Corrosion Resistant Wetted Parts**
- **Polysulfone Viewing Window**
- **Automatic Display Shutoff**
- **Weather tight Housing**

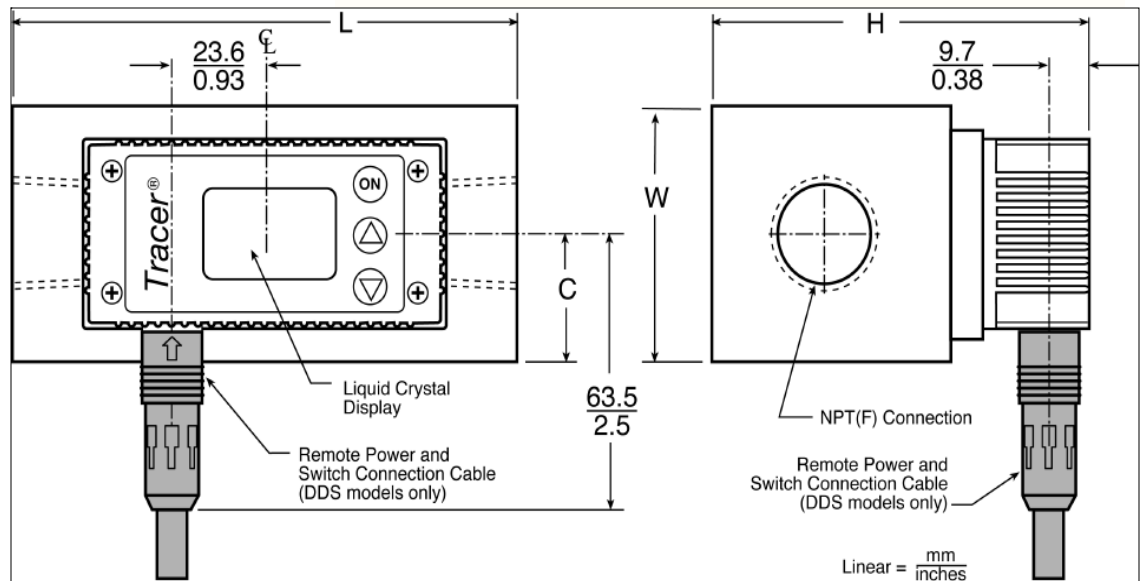

**CALL FOR MORE
INFORMATION!!**

Tevac Model Numbers and Specifications

Model #	Connection Size	Flow Range	Accuracy*	Repeatability	Flow Range	Accuracy*	Repeatability
B-DD-3B	3/8" NPT F	.5-5.0 gpm	±3%	±3%	.5-5.0 gpm	±3%	±3%
B-DD-3E	3/8 Quick Connect Fitting						