

| PART NUMBER | DIA. (MM.) | LENGTH "B" |
|-------------|------------|------------|
| MNT-40-48 | 40 | 48" |
| MNT-40-72 | 40 | 72" |
| MNT-40-144* | 40 | 144" |
| MNT-50-48 | 50 | 48" |
| MNT-50-72 | 50 | 72" |
| MNT-50-144* | 50 | 144" |

SPECIFICATIONS:



- "J" TYPE-STANDARD
- 3/16" WIDE STEEL STRAP
- STAINLESS STEEL BRAID LEADS

* Includes 7ft. Heat Shrink Tube

OPTIONS:

- "K" TYPE
- UNGROUNDED
- OTHER LEAD LENGTHS AVAILABLE
- OTHER NOZZLE DIAMETERS AVAILABLE

**TEVAC
NISSEI METRIC THERMOCOUPLES**

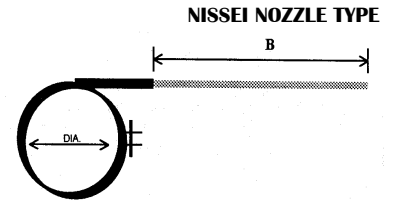

BARE WIRE LEADS / MALE PLUGS

| PART NUMBER | LENGTH | WITH PLUG PART NUMBER | LENGTH "B" |
|-------------|-----------|-----------------------|------------|
| MAJB-48 | 48" BRAID | MAJB-48P | 48" BRAID |
| MAJB-72 | 72" BRAID | MAJB-72P | 72" BRAID |

SPECIFICATIONS:


- GROUNDED, "J" TYPE
- MOVEABLE DOUBLE-SLOTTED CAP
- .480" DIAMETER METRIC BAYONET CAP

OPTIONS:

- "K" TYPE
- UNGROUNDED
- LONGER LEAD LENGTHS

**TEVAC
METRIC BAYONET ADAPTORS
FITS ALL T/C HOLES FROM 1/2" TO 10" DEEP**

**TEVAC FIXED DEPTH THERMOCOUPLES
WITH & WITHOUT PLUG**

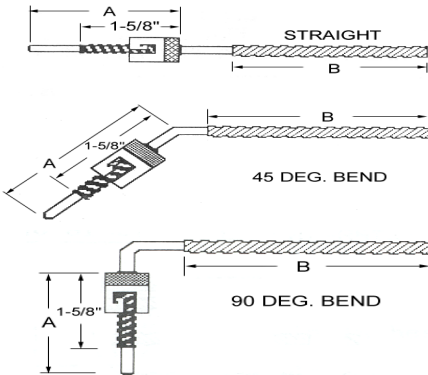

STYLE FDT

STYLE FDT-45

STYLE FDT-90

"J" TYPE WITH **SS HOSE**—NO PLUG
Standard 3/16" Diameter

"J" TYPE WITH **SS HOSE**—with PLUG
Standard 3/16" Diameter

1/4" Diameter available - Specify**
1/8" Diameter available - Specify**

| STYLE TYPE |
|------------|
| FDT |
| FDT-45 |
| FDT-90 |

| STYLE TYPE |
|------------|
| FDT-* |
| FDT-45* |
| FDT-90* |

PICTURES SHOWN DO NOT REFLECT "WITH PLUG"

OPTIONS: B-Stainless Steel Braid K-For "K" Type U-For Ungrounded

*ADD "P" TO OPTIONS BOX BELOW FOR MALE PLUG


NOTE: BASE PRICES INCLUDE- UP TO 4" OF "A" LENGTH

TO ESTABLISH PART NUMBER:

STYLE TYPE DIAMETER** (LEAVE) "A" LENGTH "B" LENGTH OPTIONS – SEE ABOVE

— — — —

EX: Style FDT-90* with plug, with "A" length of 6" & "B" length of 60", "J" Type & Ungrounded would be: **FDT-90-6-60-P-U**.

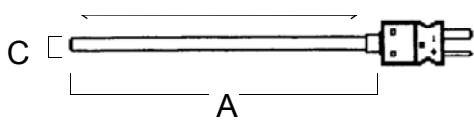

Note: Base Prices for "J" Type ONLY (with Male Plug) & Includes the first 4" of Probe Length

| PART NUMBER | DIAMETER (C) |
|-------------|--------------|
| RT-18 | 1/8" |
| RT-316 | 3/16" |
| RT-14 | 1/4" |

**TEVAC
RIGID TYPE THERMOCOUPLES
WITH MALE PLUG**

OPTIONS: MI-FOR MINERAL INSULATED K-FOR "K" TYPE FJ-FEMALE JACK (REPLACES "P") OR IF NO PLUG OR JACK-DELETE "P"

TO ESTABLISH PART NUMBER:

RT — — — — P — —

DIAMETER (C) MI-FOR MINERAL INSULATED ONLY "A" LENGTH ** OPTIONS

EX: 3/16" Diameter with 9" Probe, "J" Type. Tevac Part No. **RT-316-9-P**